

FIX MATIC

Air purger

Accessories

Technical Data Sheet



Description

The FIX MATIC is an automatic air purger for heating.

- Removable isolation valve
- Purger plug



FIX MATIC

Air purger - Accessories


DN	Ref.	Weight Kg
3/8	149B5106	0,11

Technical features

Operating temperature	Maxi. 110 °C
Maximum permissible pressure (PS) other mediums	12 bar
Connection	Male, 3/8"

Nomenclature and materials


N°	Description	Materials
1	Body	Brass
2	Cover	Brass
3	Lever	Polyacztal
4	Closing system	EPDM
5	O-ring	NBR
6	Spring	Stainless steel
7	Cap	Polyamide
8	Float	Polyethylene



Sizing


DN A	B	Ø C	Ø D	E	F
3/8	19	43	49	8	77

FIX MATIC



Operation

FIX MATIC - Air flow / service pressure

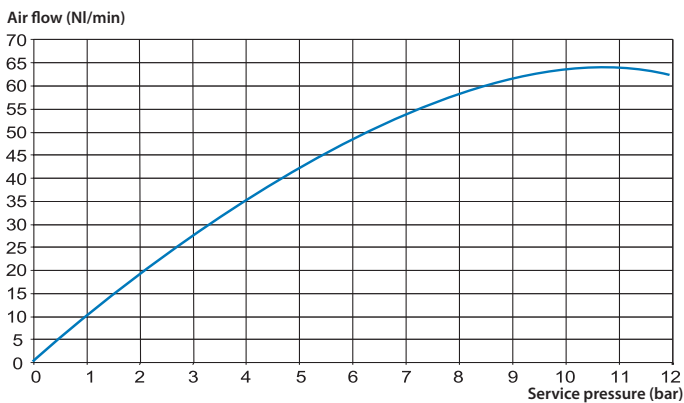

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Socla reserves the right to carry out any technical and design improvements to its products without prior notice. Warranty : All sales and contracts for sale are expressly conditioned on the buyer's assent to Socla terms and conditions found on its website at www.socla.com. Socla hereby objects to any term, different from or additional to Socla terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Socla.



A WATTS Brand

Socla sas

365 rue du Lieutenant Putier • 71530 Virey-Le-Grand • France

Tel. +33 03 85 97 42 00 • Fax +33 03 85 97 42 42

contact@wattswater.com • www.socla.com

ISO 9001 version 2015 / ISO 18001